ASV

RT-75

www.hwyequip.com

OPERATIONS

Loader Arms	... Radial
Operating Wt.	... 9060 lbs
Rated Oper. Cap. @ 35%	... 2750 lbs
Rated Oper. Cap. @ 50%	... 3929 lbs
Ground Pressure (std. trk.)	... 3.5 psi
Engine Power	... 74 hp
Tipping Load	... 7857 lbs
Max. Single Travel Speed	... 6.3 mph
Height to Bkt Pin	... 125.5 in.
Dump hgt @ Bkt Discharge	... 96 in.
Rear Angle of Departure	... 38 deg.
Bkt Roll Back @ Ground Lev.	... 41 deg.
Ground Clearance	... 14.4 in.
Overall Length w/ Bkt	... 148 in.
Reach @ Dump Hgt.	... 24 in.

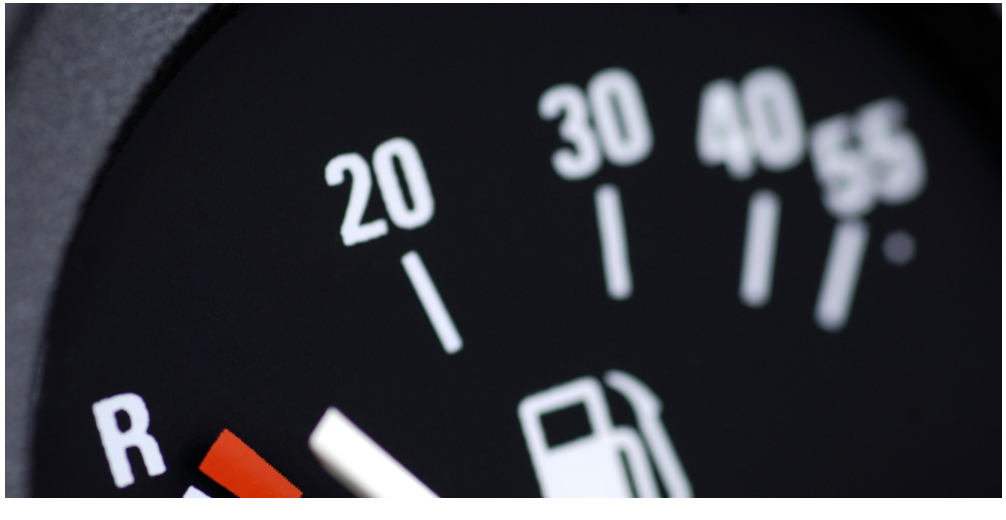

SERVICE CAPACITY

Fuel Tank	18.4 gal
Hydraulic Tank	8 gal
Engine Coolant	5.5 gal
Engine Oil (Incl. Filter)	9 quarts

COMFORT

- SJC for easy, intuitive operation.
- Optional All Weather Pressurized Cab for cleaner operating environment.
- Upgraded HVAC.
- More space & improved ergonomics.

POWER

- Cummins 2.8 liter turbocharged diesel engine
- 75 hp
- 221 foot-pounds of torque

PERFORMANCE

- Highly efficient aux. hydraulic system
- More flow & pressure directly to the attachement.

ELECTRICAL SYSTEM

Features	Upgradeable Wiring Harness, Attch Ctrl Kit
Normal Charge	12V
Battery	950 CCa
Alternator Charging System	120 Amp
Port Outlet (In cab)	1–12 V

Available in:
Harrisburg 717-564-3031
Brownstown 717-859-3132
Lock Haven 570-769-1070
MAX-SERIES
RT-75
POSI-TRACK
asv
CUMMINS
SEE THE DIFFERENCE AT
HIGHWAY
EQUIPMENT & SUPPLY CO.